



FL08 LED Flood Light


Deliver Superior Uniform Illumination For Facades, Landscapes,
And Parking Areas

Optimized Optics To Minimize Glare And Enhance Visual Comfort



Features

- High efficacy up to 150lm/W.
- 3CCT and 4 Wattages Selectable offer SKU reduction.
- 4 kinds of mounting brackets available (Knuckle Mount, Trunnion Mount, Yoke Mount, Slipfitter Mount).
- Standard Photocell (dusk-to-dawn function) is included as default.

Dimensions

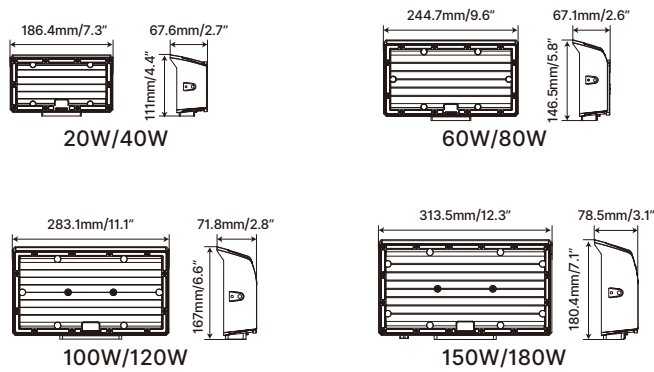

Installation

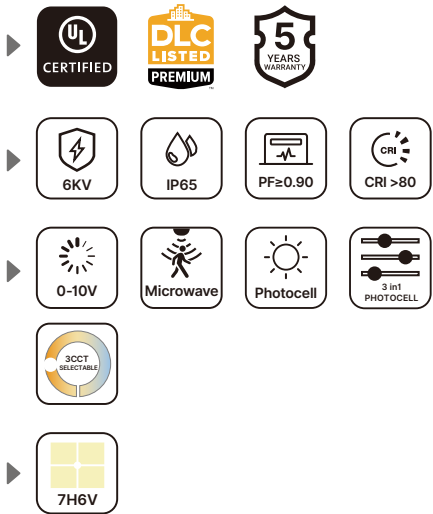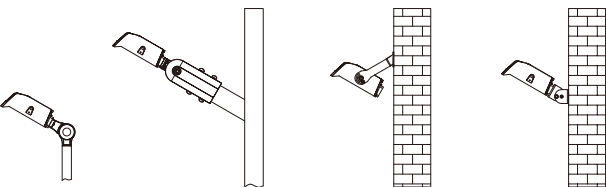

Accessories



Code	Watt	Lumen	Efficacy	Voltage	CCT
FL08-7"	20W	3,000lm@4000K	150lm/W	AC120-277V AC120-347V	3CCT selectable: 3000K/4000K/5000K
FL08-7"	40W	6,000lm@4000K	150lm/W		
FL08-9"	60W	9,000lm@4000K	150lm/W		
FL08-9"	80W	12,000lm@4000K	150lm/W		
FL08-11"	100W	15,000lm@4000K	150lm/W		
FL08-11"	120W	18,000lm@4000K	150lm/W		
FL08-12"	150W	22,500lm@4000K	150lm/W		
FL08-12"	180W	27,000lm@4000K	150lm/W		
FL08-14"	300W	45,000lm@4000K	150lm/W		

Remarks: All above efficiency please check IES files for accurate data.

