



LHB12

Linear High Bay Light


Provide Bright, Uniform Light Throughout Your Industrial Space

High Lumen Output With Low Glare



Features

- High efficacy up to 180lm/W.
- Low glare with UGR<15.
- 3CCT and 4 Wattages Selectable offer SKU reduction.
- Ventilated window design in the driver box enhances convective cooling.
- Multiple installation ways of Chain Mount, Surface Mount, and Pendant Mount.

Dimensions

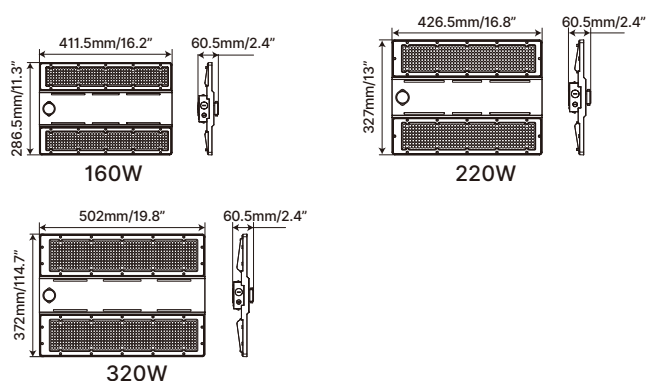

Installation

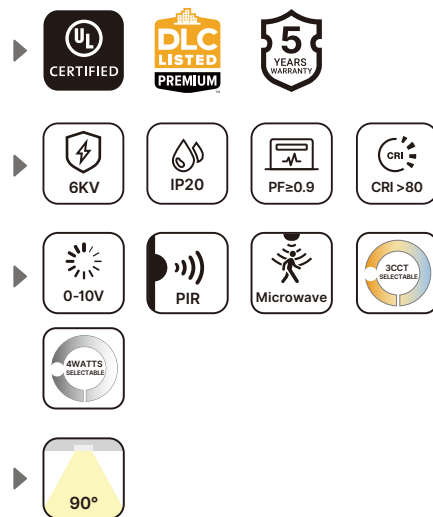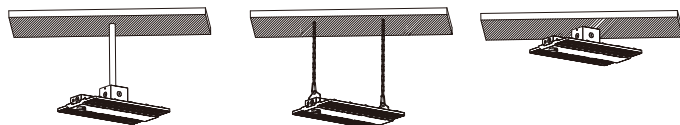

Accessories



Code	Watt	Lumen	Efficacy	Voltage	CCT
LHB12-1.3FT	160W	28,800Lm@160W	180lm/W	AC120-277V AC120-347V	3CCT selectable: 3500K/4000K/5000K
LHB12-1.4FT	220W	39,600Lm@220W	180lm/W		
LHB12-1.6FT	320W	57,600Lm@320W	180lm/W		

Remarks: All above efficiency please check IES files for accurate data.

