



WP33 LED Wall Pack


An Ideal Complement To Site And Facade Lighting Design

Architectural Wall Pack with Up & Down Lighting Direction



Features

- Heavy-duty die-cast aluminum construction.
- Efficacy up to 150 LM/W.
- 3 Aesthetic shapes: Trapezoid (T), Radius (R), Quartersphere(Q).
- 3 in 1 switch available (CCT, wattage, built-in photocell on/off).
- Up & Down lighting direction selectable.
- Emergency power available.

Dimensions

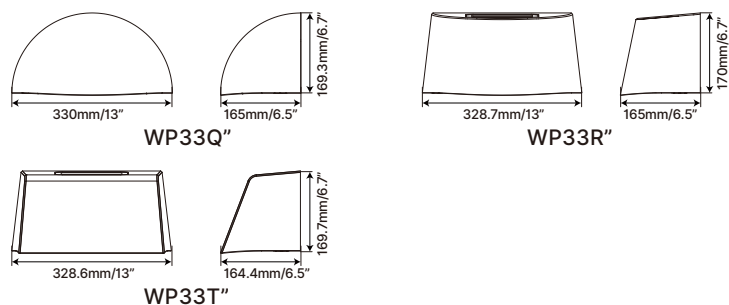

Installation

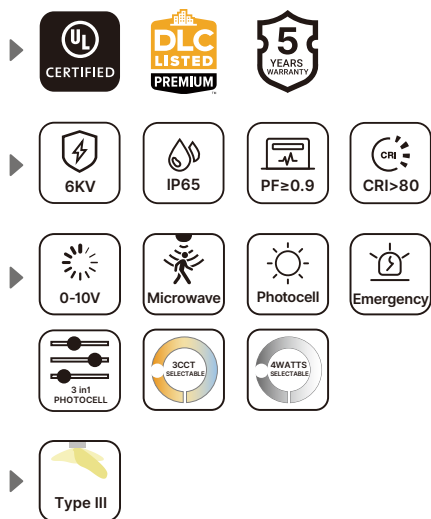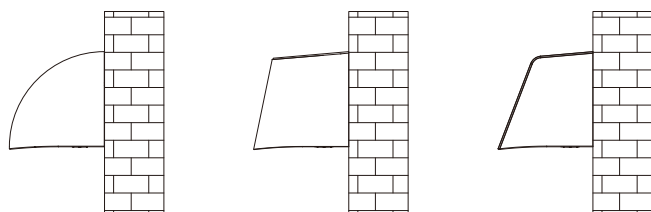

LED Wall Pack Light

Accessories



Code	Watt	Lumen	Efficacy	Voltage	CCT
WP33Q-40	40W	6,000lm@4000K	150lm/W	AC120-277V AC120-347V	3CCT selectable: 3000K/4000K/5000K
WP33Q-80	80W	12,000lm@4000K	150lm/W		
WP33Q-120	120W	18,000lm@4000K	150lm/W		
WP33R-40	40W	6,000lm@4000K	150lm/W		
WP33R-80	80W	12,000lm@4000K	150lm/W		
WP33R-120	120W	18,000lm@4000K	150lm/W		
WP33T-40	40W	6,000lm@4000K	150lm/W		
WP33T-80	80W	12,000lm@4000K	150lm/W		
WP33T-120	120W	18,000lm@4000K	150lm/W		

Remarks: All above efficiency please check IES files for accurate data.

