



DATE

PROJECT

PART NUMBER

GS12 48A / 80A AC Electric Vehicle Charger

- Residential and commercial Level 2 AC electric vehicle charger
- Modern, ergonomic, low profile design
- Indoor and outdoor NEMA TYPE 3R rated enclosure
- VO rated thermoplastic enclosure
- SAEJ1772 (Type 1) charging interface with built in plug receptacle
- LED charge status indicator
- Output current available from 16A to 80A
- Output current programmable from 16A to 48A with GS12-48A model
- Standard LAN wired connection for central management system
- Standard RFID module for user identification and management
- Standard WiFi + Bluetooth and optional 4G wireless connections
- Standard OCPP 1.6 JSON
- Over-the-air firmware updates available
- Standard 18ft cable, optional 25ft cable
- ISO15118 Vehicle-to-Grid function in development*
- Compatible with bespoke pedestals and cable management systems
- 2 year limited warranty



Models	GS12-48A	GS12-80A**
LAN	✓	✓
OCPP 1.6 JSON	✓	✓
RFID (two cards included)	✓	✓
WiFi + Bluetooth	✓	✓
4G	●	●
ISO15118 Vehicle-to-Grid	Contact us	Contact us
LED Status Indicator	✓	✓
SAEJ1772 Type 1 Plug	✓	✓
18ft Cable	✓	✓
25ft Cable	●	●
Wall Mount Cable Hook	●	●
NEMA 14-50 Plug	●	●
NEMA 6-50 Plug	●	●

Legend: Standard ✓ Optional ● Special order item **



All documentation is subject to change without notice.
 Please refer to our website for the latest product information and specifications.
 *Please contact us for additional configuration details.



DATE
PROJECT
PART NUMBER

Models	GS12-48A	GS12-80A**
Power Specifications		
AC Input Voltage	200~240Vac/Single phase	
AC Input Connection	L1/L2/GND	
Input Current	48A	80A
Frequency	50Hz/60Hz	
Output Current	48A	80A
Circuit Breaker Requirement	60A	100A
User Interface and Control		
User Authentication	RFID ISO14443A (Standard), two RFID cards included	
Communication		
External	LAN (Standard) WiFi + Bluetooth (Standard) 4G (Optional)	
Internal	OCPP 1.6 J2013	
Vehicle-to-Grid	ISO15118 (Contact us)	
Environmental		
Operating Temperature	-30°C~50°C	
Humidity	Max. 95% RH	
Altitude	≤2000m	
IP Level	NEMA TYPE 3R	
Cooling Method	Natural Cooling	
Mechanical		
Dimensions (H x W x D)	14.2" x 9.8" x 4.4"	
Weight	16.0lbs	19.5lbs
Cable Length	18ft (Standard), 25ft (Optional)	
Protection		
RCD/CCID	CCID20	
Input Side	UVP, OVP, Surge protection, Ground fault	
Output Side	OCP, Control pilot fault, Residual current protection	
Internal	OTP, Relay welding detection, CCID self-test, MCU function fault detection	
Regulation		
Certificate	UL2594, UL2231-1/-2	
Wireless Certificate	FCC/IC	
Charging Interface	SAEJ1772 Type 1 Plug	



All documentation is subject to change without notice.
Please refer to our website for the latest product information and specifications.
*Please contact us for additional configuration details.



DATE

PROJECT

PART NUMBER

Electric Vehicle Charger Pedestals and Cable Management Systems



Single Electric Vehicle Charger Pedestal

Dimensions
270x155x1395mm

Cable Length 18ft or 25ft

Compatibility
GS12

Dual Back-to-Back Electric Vehicle Charger Pedestal

Dimensions
270x155x1395mm

Cable Length 18ft or 25ft

Compatibility
GS12

Single Electric Vehicle Charger Pedestal with Cable Management System

Dimensions
400x220x1987.5mm

Cable Length 18ft only

Compatibility
GS12

Dual Back-to-Back Electric Vehicle Charger Pedestal with Cable Management System

Dimensions
400x220x1987.5mm

Cable Length 18ft only

Compatibility
GS12

Dual Side-by-Side Electric Vehicle Charger Pedestal with Cable Management System

Dimensions
710x220x1987.5mm

Cable Length 18ft only

Compatibility
GS12



All documentation is subject to change without notice.
Please refer to our website for the latest product information and specifications.
*Please contact us for additional configuration details.





DATE
PROJECT
PART NUMBER



Home Electric Vehicle Charging Management App

- Home EV charging management app
- Connect to your EV charger via WiFi or Bluetooth
- WiFi network provisioning and configuration
- Simple user interface
- Schedule charging session start times
- Adjust output current from 16A to 48A with our GS12-48A model
- Mitigate peak electricity rate usage through scheduling
- Monitor and update charging status in real-time
- Access charging record to view previous session details
- Monitor charging faults and errors
- Over-the-air firmware and app updates
- No subscription fees or account required

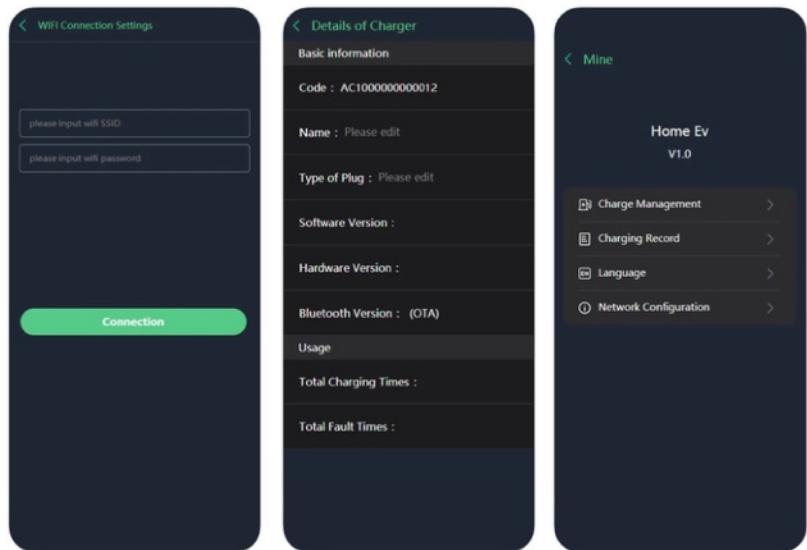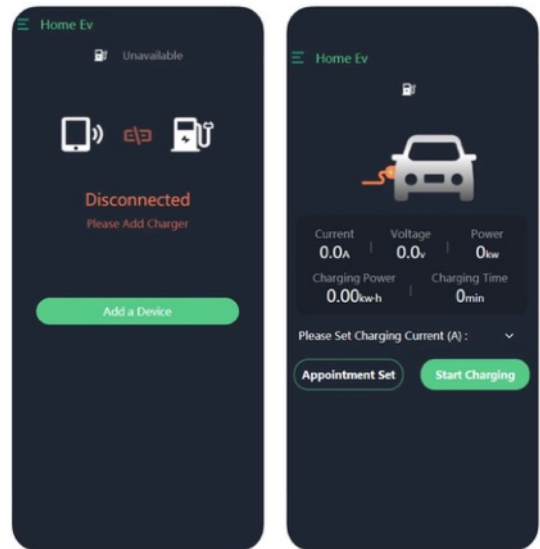

All documentation is subject to change without notice.
Please refer to our website for the latest product information and specifications.
*Please contact us for additional configuration details.